




PNEUMATIC

LARGE

GRIPPER

PLG



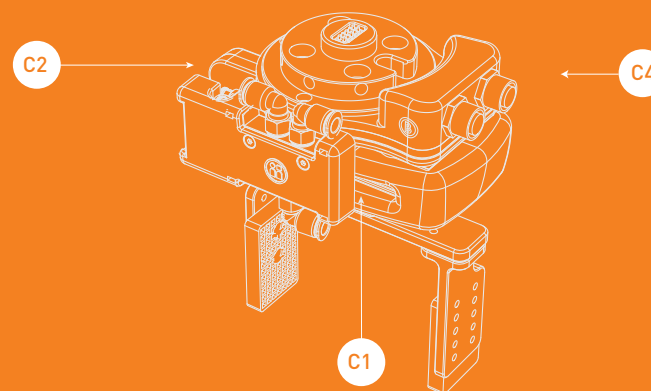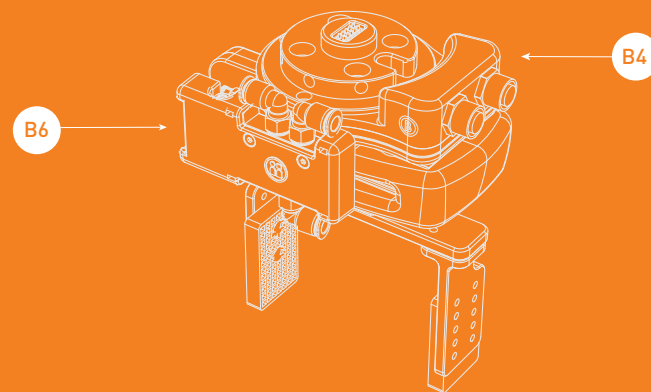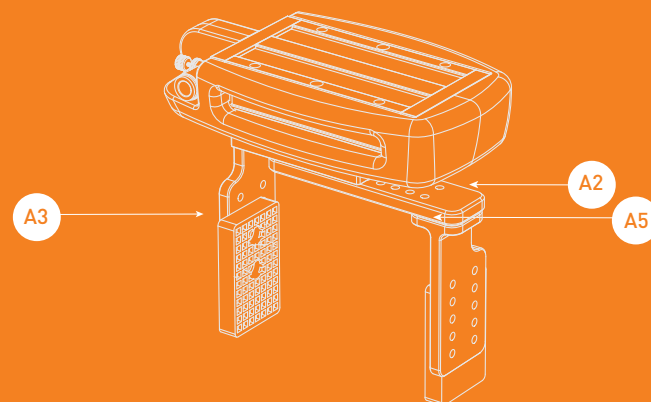







99-00000606-00

99-00000605-00

99-00000564-00

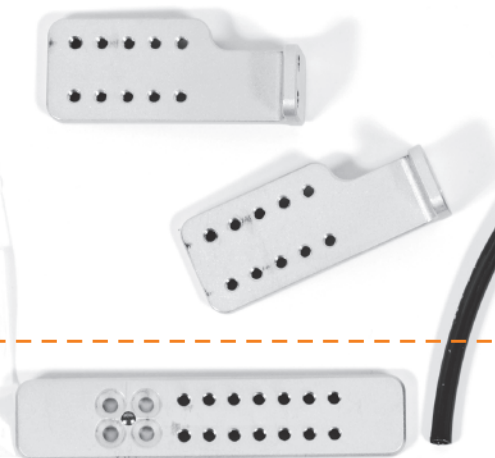


98-00070258-00




99-00000607-00



70053

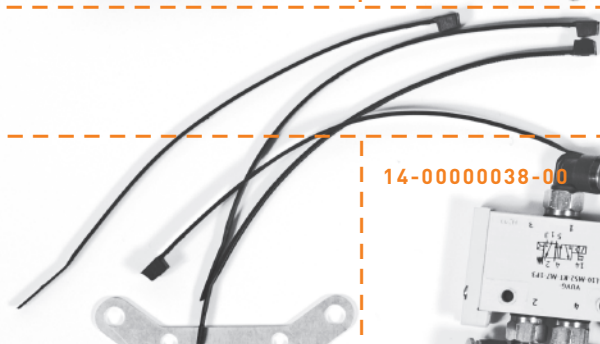


14-00000038-00

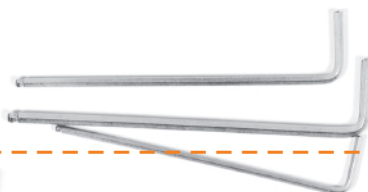





99-00000575-00









99-00000641-00

98-00070273-00

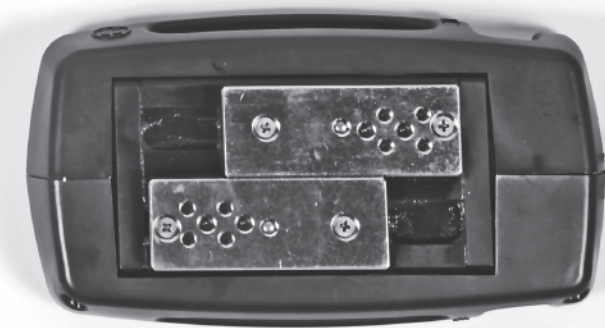


98-00070260-00

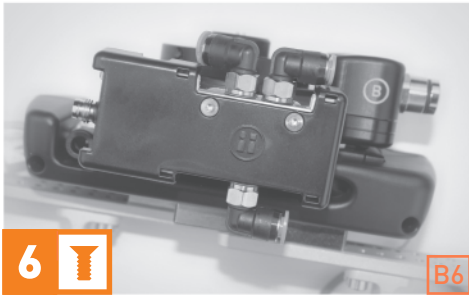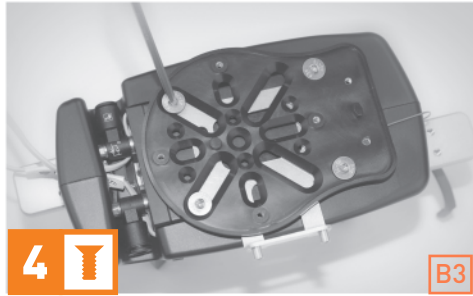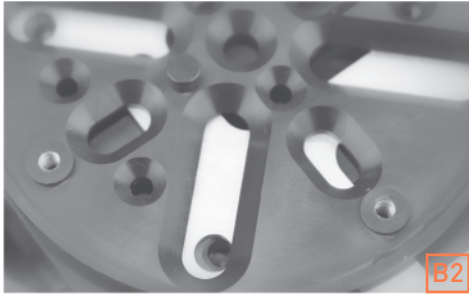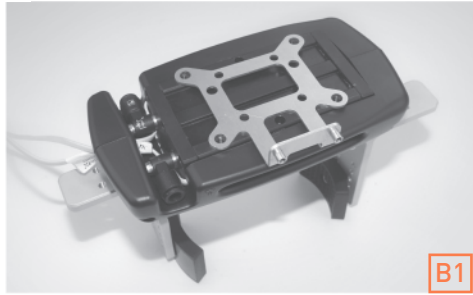

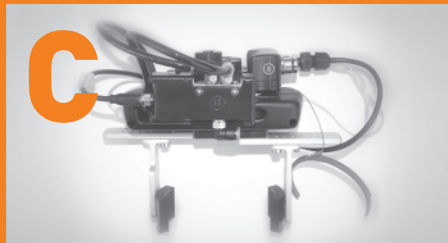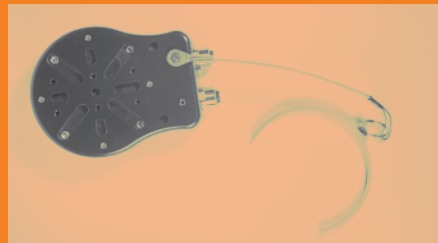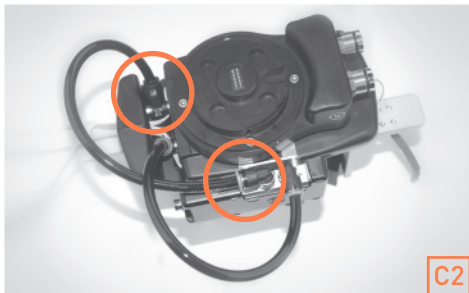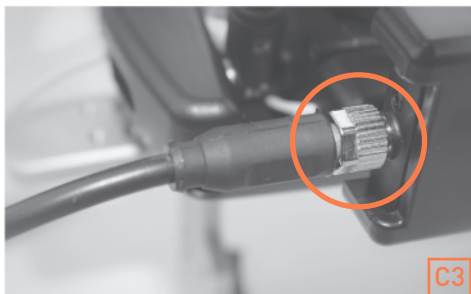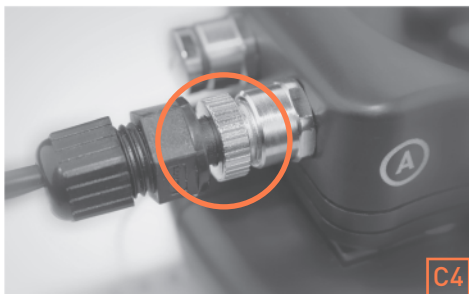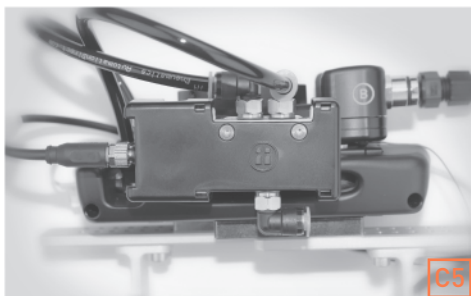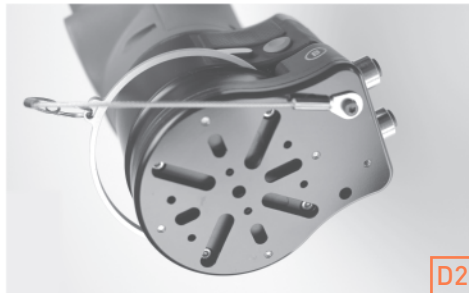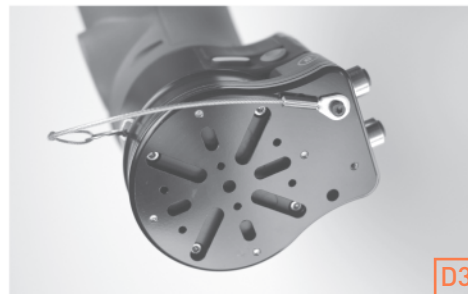C**D****C1****C2****C3****C4****C5****D1****D2****D3**

Software Configuration
 Configuración del software
 Configuration logicielle
 Software-Konfiguration
 软件设置
 ソフトウェア設定
 소프트웨어 구성

<http://mfg.rethinkrobotics.com/intera>

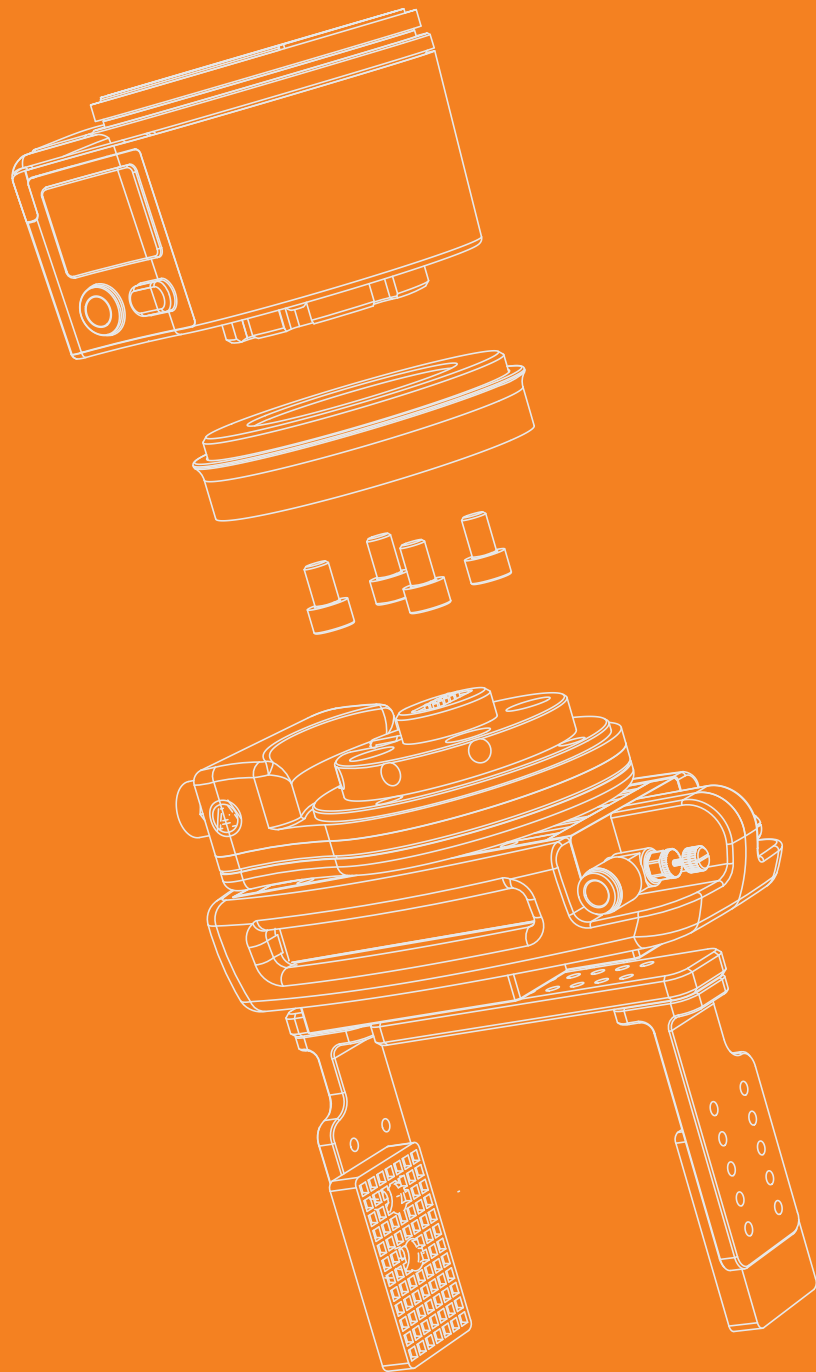


MAINTENANCE, MANTENIMIENTO, WARTUNG, 维护, ENTRETIEN, メンテナンス, 유지 보수

SOLENOID VALVE	14-00000038-00
Standard nominal flow rate	340—380 l/min
Working pressure	2.5—8 bar
Operating medium	Compressed air in accordance with ISO 8573-2010 [7:4:4]
Medium temperature	-5—60 °C
Ambient temperature	-5—60 °C

PNEUMATIC GRIPPER	98-00070260-00
Operating medium	Filtered, lubricated/non lubricated compressed air
Operating pressure range	2—8 bar
Operating temperature range	5—60 °C
Grease gripper after 10 million cycles	Molykote DX (metal on metal) Molykote PG75 (gaskets)

MAX WIDTH AND LENGTH

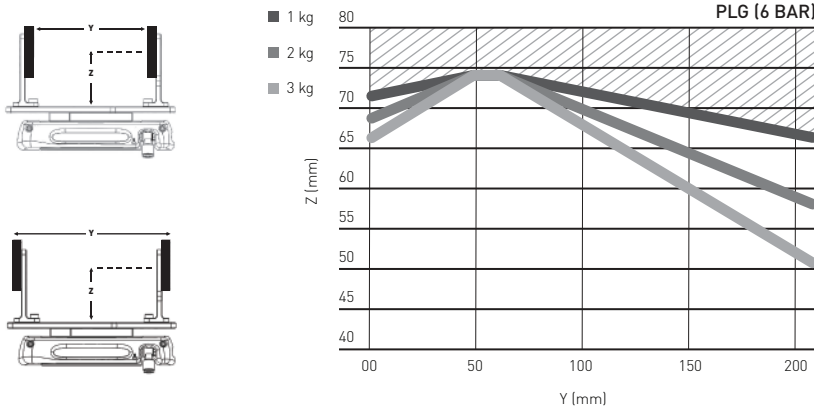

	SHCS		FHCS		BHCS		SHSS	
FASTENER SIZE	(N-m)	(in-lb)	(N-m)	(in-lb)	(N-m)	(in-lb)	(N-m)	(in-lb)
M2.5	1.3	11.5	—	—	—	—	—	—
M3	2.2	19.5	1.4	12.4	1.4	12.4	—	—
M4	4.8	42.5	3.1	27.4	3.1	27.4	1.3	11.5
M5	10	88.5	6.1	54.0	6.1	54.0	—	—

System Ingress Protection (IP) Rating: IP54