



PNEUMATIC

SMALL

GRIPPER


PSG



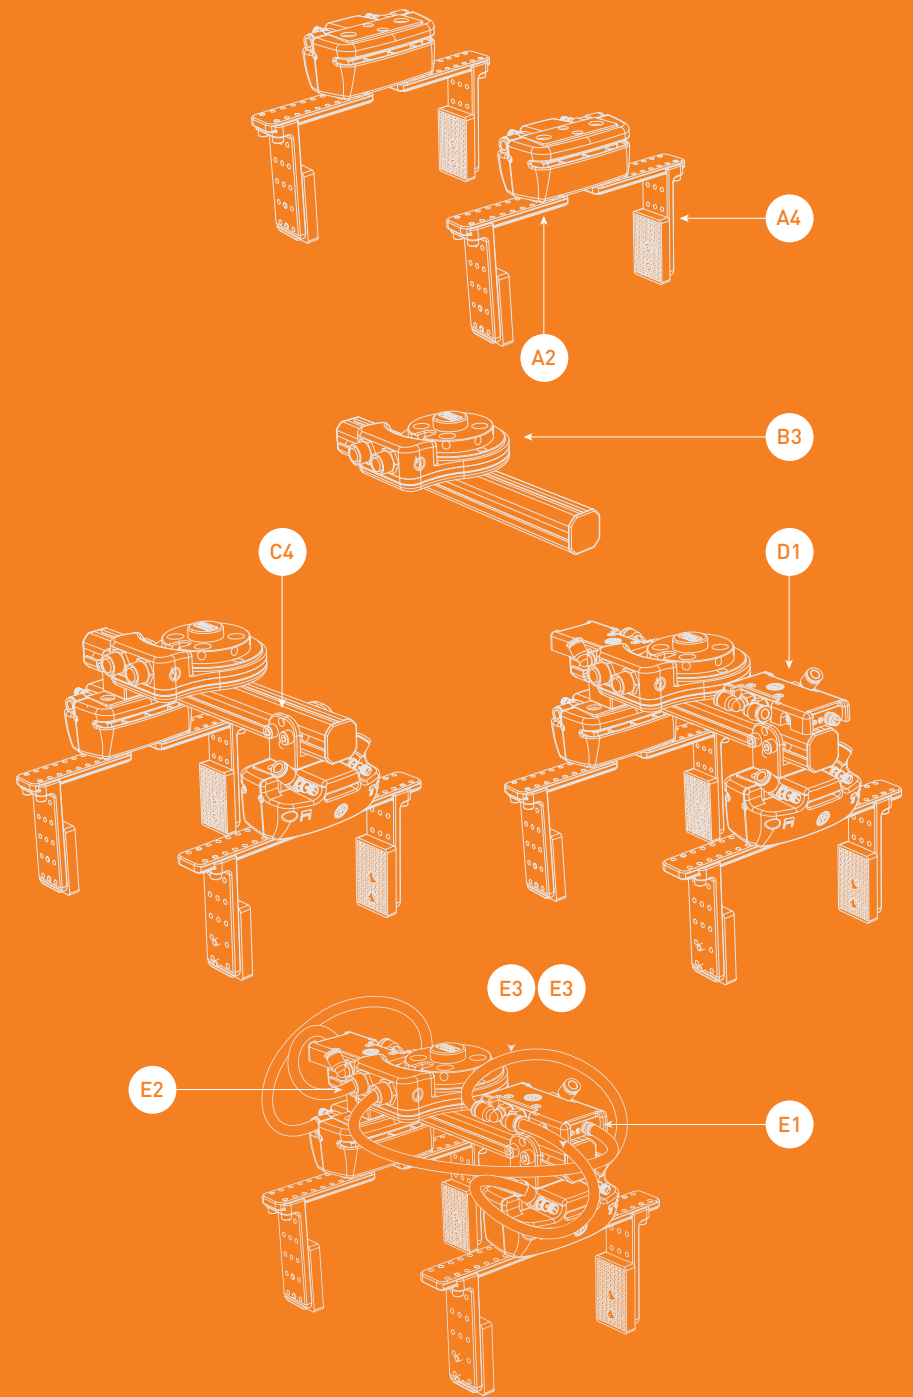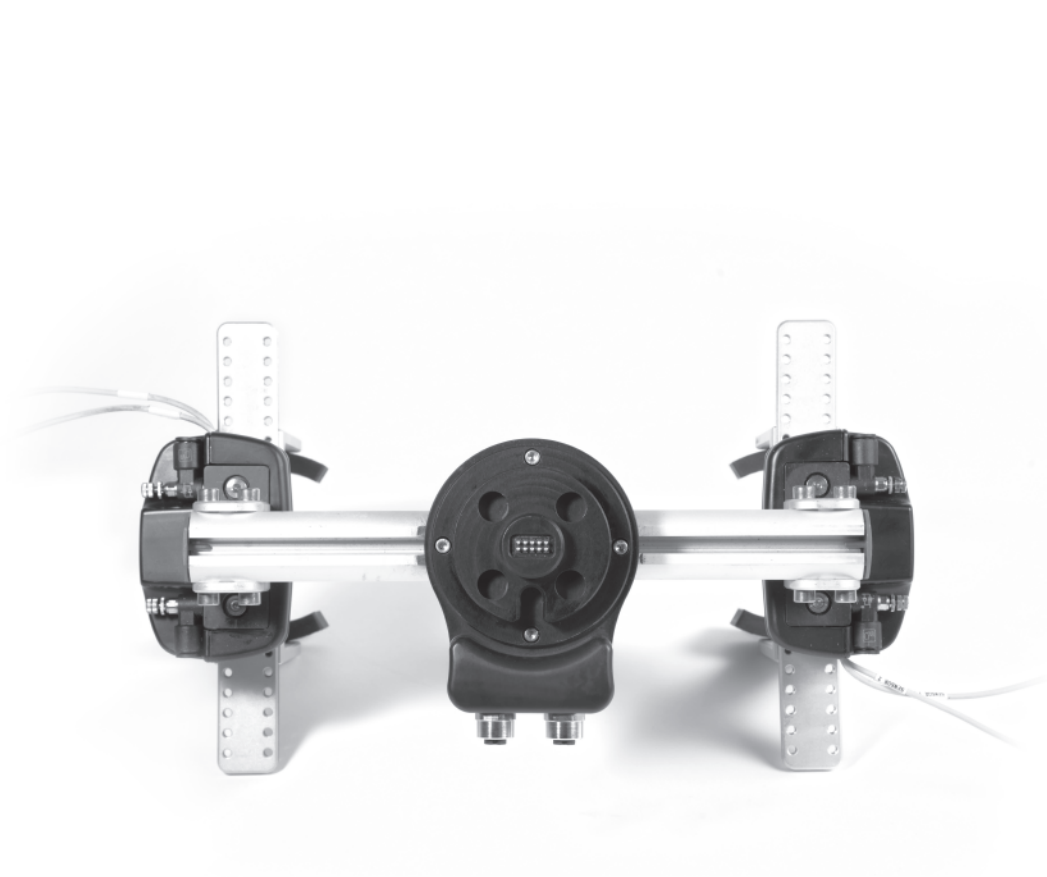



99-00000597-00

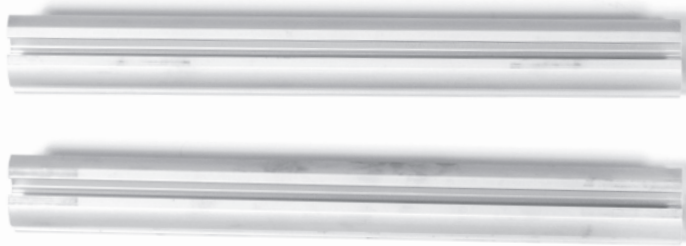


99-00000570-00



99-00000605-00



99-00000598-00



99-00000581-00



99-00000569-00



99-00000571-00



89-00000607-00



70053




99-00000606-00

98-00070273-00



14-00000038-00




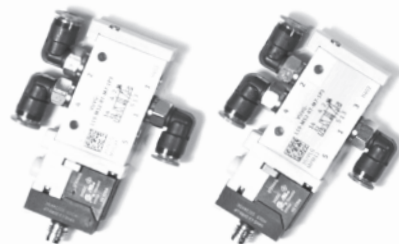











99-00000641-00




98-00070261-00



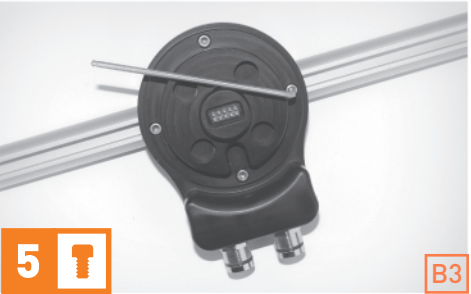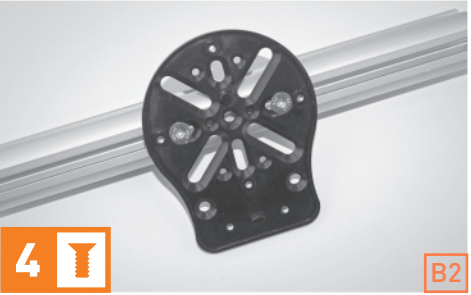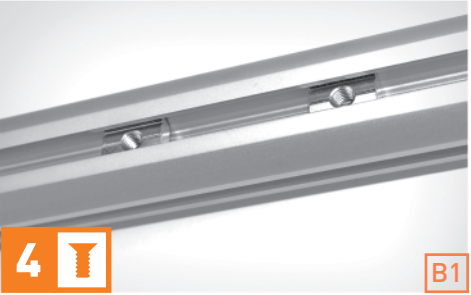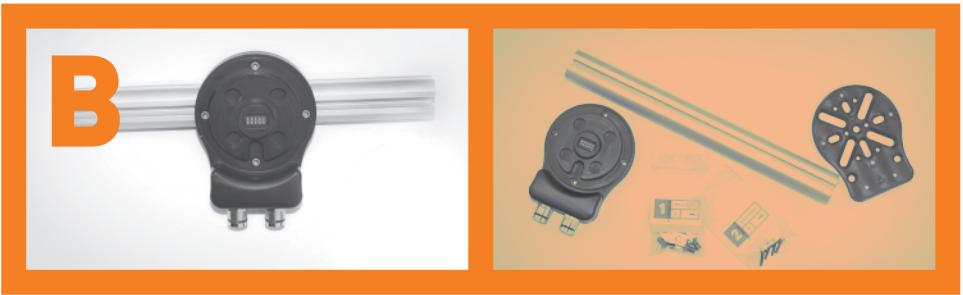


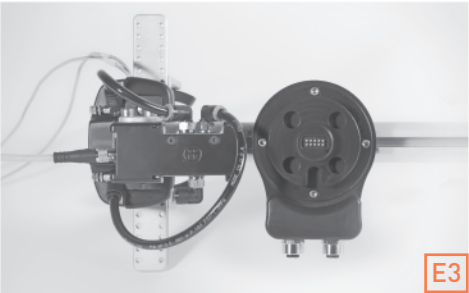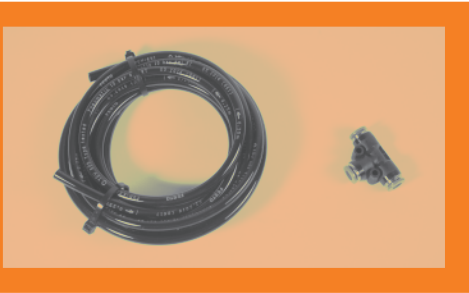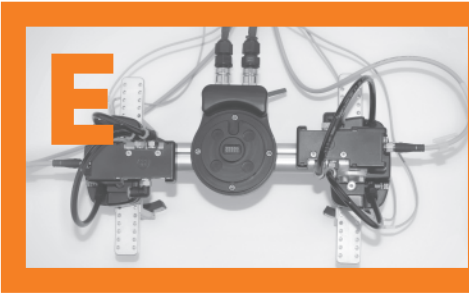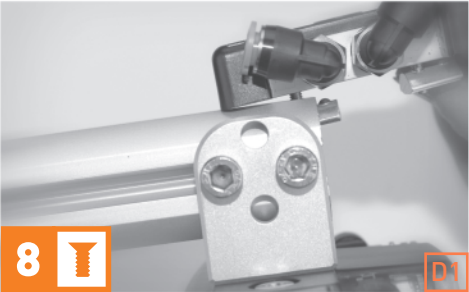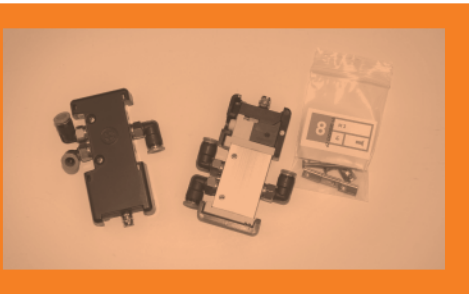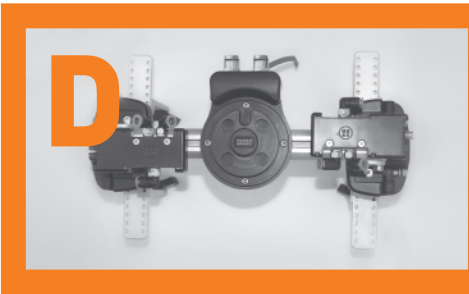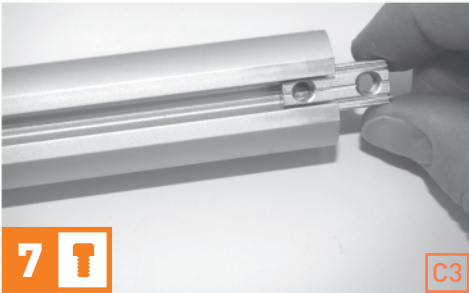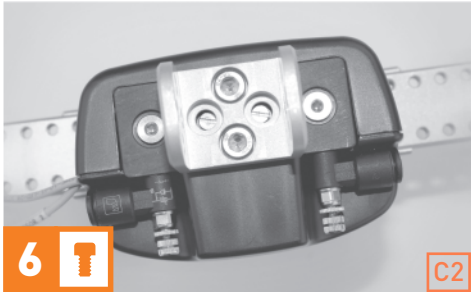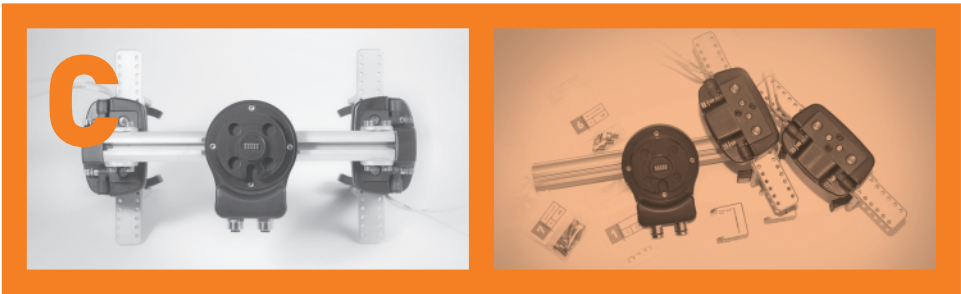


F

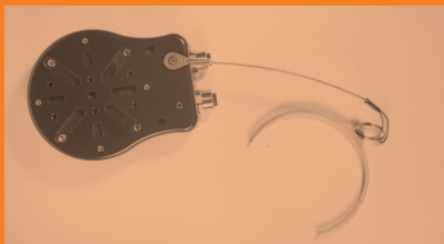

F1

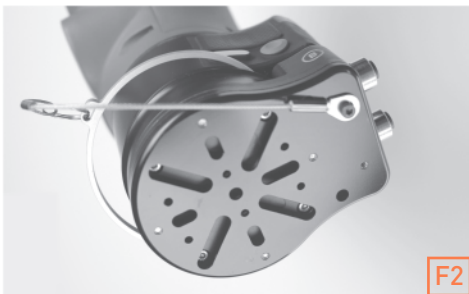

F2

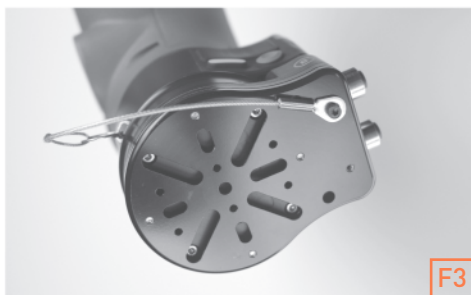

F3

Software Configuration
Configuración del software
Configuration logicielle
Software-Konfiguration
软件设置
ソフトウェア設定
소프트웨어 구성

<http://mfg.rethinkrobotics.com/intera>

MAINTENANCE, MANTENIMIENTO, WARTUNG, 维护, ENTRETIEN, メンテナンス, 유지 보수

SOLENOID VALVE

14-00000038-00

Standard nominal flow rate	340—380 l/min
Working pressure	2.5—8 bar
Operating medium	Compressed air in accordance with ISO 8573-2010 [7:4:4]
Medium temperature	-5—60 °C
Ambient temperature	-5—60 °C


PNEUMATIC GRIPPER

98-00070261-00

Operating medium	Filtered, lubricated/non lubricated compressed air
Operating pressure range	2—8 bar
Operating temperature range	5—60 °C

Grease gripper after 10 million cycles	Molykote DX (metal on metal) Molykote PG75 (gaskets)
---	---

MAX WIDTH AND LENGTH

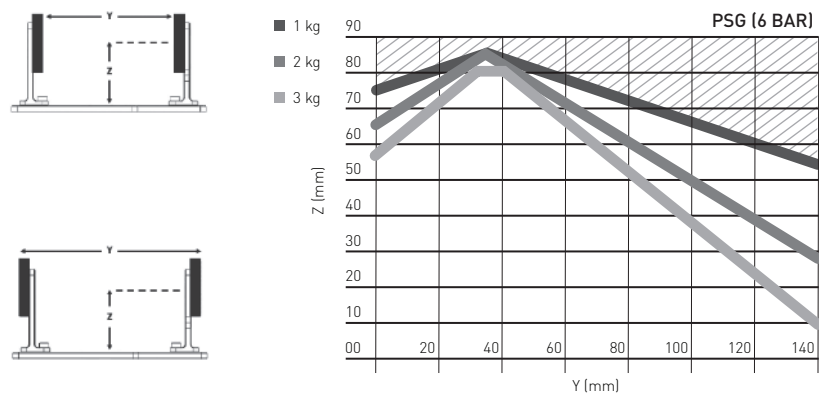

FASTENER SIZE	SHCS		FHCS		BHCS		SHSS	
	(N-m)	(in-lb)	(N-m)	(in-lb)	(N-m)	(in-lb)	(N-m)	(in-lb)
M2.5	1.3	11.5	—	—	—	—	—	—
M3	2.2	19.5	1.4	12.4	1.4	12.4	—	—
M4	4.8	42.5	3.1	27.4	3.1	27.4	1.3	11.5
M5	10	88.5	6.1	54.0	6.1	54.0	—	—

System Ingress Protection (IP) Rating: IP54